

## Max.digging depth $0.025 \text{ m}^3$ changchai 192 Max.digging height

Max.digging distance

Min.Swing radius

**Dimensions** 

Total width

Max. Upgrade height of bulldozer blade

Max. Digging depth of bulldozer blade

2450mm

1450mm

2350mm

1600mm

1100mm

120mm

200mm

720-780mm

Max.dumping height

12HP

800 kg

7.5KN

14Mpa

12 rpm

2.2Km/h

Single gear pump

Rated power

**Bucket Capacity** 

**Operating Weight** 

Max. digging force

Set working pressure

Engine Model

Pump form

Swing speed

Travel speed



Grabber




Break

Hammer





Ripper

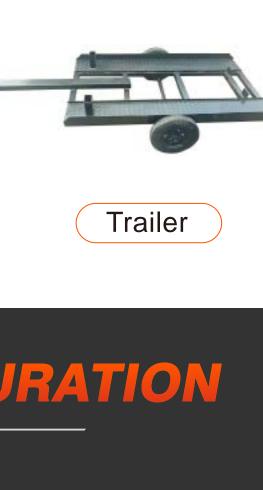

Narrow Bucket

Bucket





The operation front pipeline is clear The protective cover protects the pipeline from being destroyed

The boom cylinder adopts

The cylinder is designed integrated,

which is more advanced than the

the well-known brand

welding technology.

03




Shot blasting, pickling, and

high paint adhesion.

baking finish process are adopted.

The surface has high gloss and

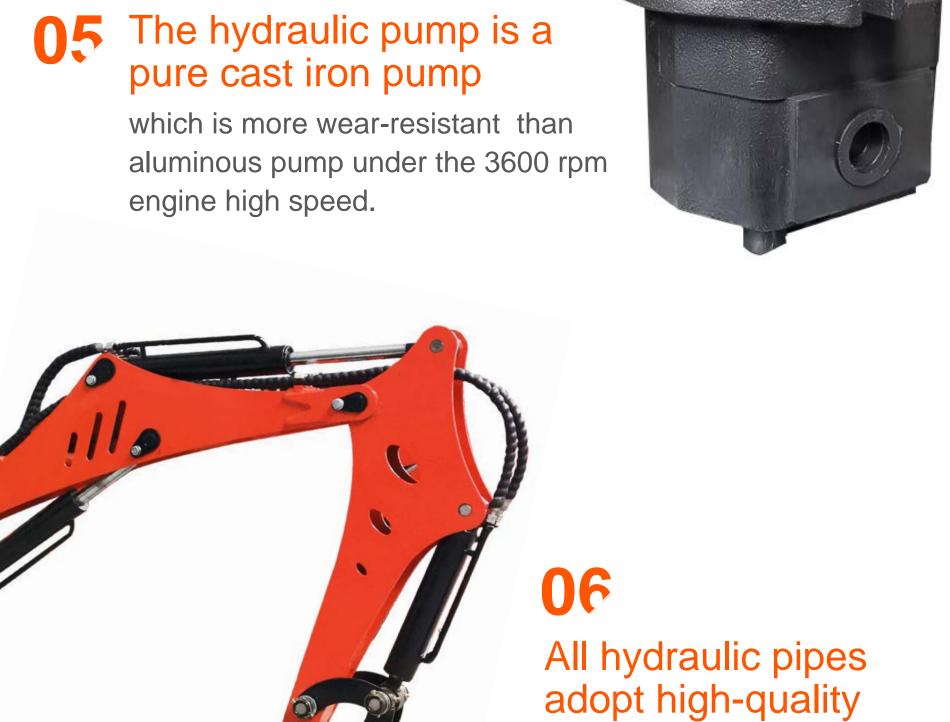

German imported pipes



7 Well-known crawler brand

a well-known crawler brand in China.

For rubber track which uses Jin Lilong/Yuanchuang brand,

processing equipment to ensure the perfect bite and seamless welding of machine parts.

LEADING MANUFACTURING

**TECHNOLOGY** 

EXCAVATOR FACTORY

HIGHTOP has RGV assembly line and automatic welding robot, and has high static

